


FM/AM RF, MIX, OSC, IF  
HIGH FREQUENCY AMPLIFIER APPLICATIONS.

**FEATURES:**

- . High Stability Oscillation Voltage On FM Local Oscillator.
- . Recommend FM/AM RF, MIX, OSC and IF.

Unit in mm

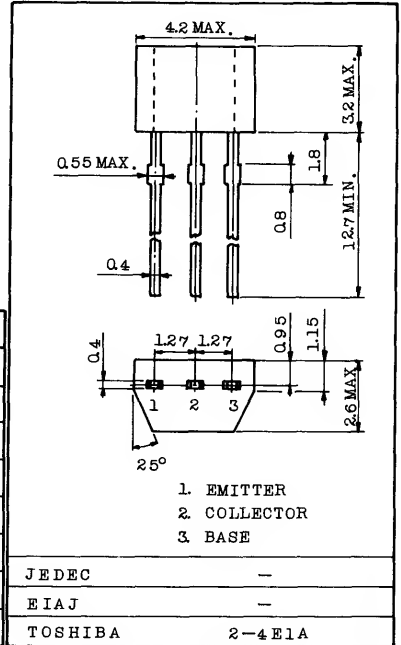

**MAXIMUM RATINGS (Ta=25 °C)**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V <sub>CB0</sub>	40	V
Collector-Emitter Voltage	V <sub>CE0</sub>	30	V
Emitter-Base Voltage	V <sub>EB0</sub>	4	V
Collector Current	I <sub>C</sub>	50	mA
Emitter Current	I <sub>E</sub>	-50	mA
Collector Power Dissipation	P <sub>C</sub>	200	mW
Junction Temperature	T <sub>j</sub>	125	°C
Storage Temperature Range	T <sub>stg</sub>	-55 ~ 125	°C

JEDEC	-
EIAJ	-
TOSHIBA	2-4E1A


Weight : 0.13g

**ELECTRICAL CHARACTERISTICS (Ta=25°C)**

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I <sub>CB0</sub>	V <sub>CB</sub> =40V, I <sub>E</sub> =0	-	-	0.1	μA
Emitter Cut-off Current	I <sub>EB0</sub>	V <sub>EB</sub> =4V, I <sub>C</sub> =0	-	-	0.5	μA
DC Current Gain	h <sub>FE</sub> (Note)	V <sub>CE</sub> =6V, I <sub>C</sub> =1mA	40	-	240	
Reverse Transfer Capacitance	C <sub>re</sub>	V <sub>CE</sub> =6V, f=1MHz	-	0.9	1.3	pF
Transition Frequency	f <sub>T</sub>	V <sub>CE</sub> =6V, I <sub>E</sub> =-1mA	150	350	-	MHz
Collector-Base Time Constant	C <sub>c.rbb'</sub>	V <sub>CE</sub> =6V, I <sub>E</sub> =-1mA, f=30MHz	-	15	30	ps
Noise Figure	NF	V <sub>CC</sub> =6V, I <sub>E</sub> =-1mA f=100MHz (Fig.1)	-	4.0	-	dB
Power Gain	G <sub>pe</sub>		-	15	-	
Oscillation Output Voltage	V <sub>OSC</sub>	V <sub>CC</sub> =6V, f=100MHz (Fig.2)	-	150	-	mV


Note : h<sub>FE</sub> Classification R:40~80 O:70~140 Y:120~240

Fig. 1 NF,  $G_{pe}$  TEST CIRCUIT

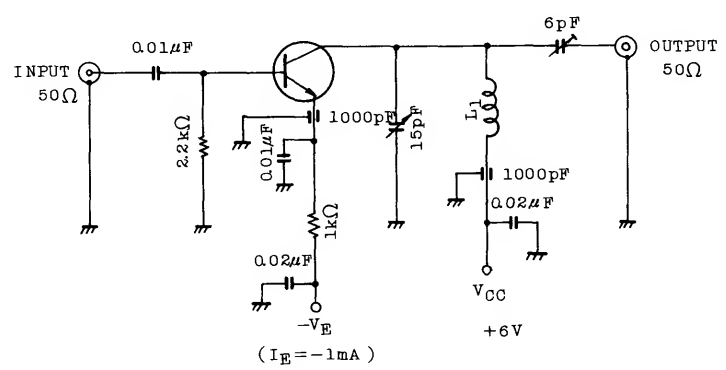

$L_1$  : 0.8mm $\phi$  SILVER PLATED COPPER WIRE, 4T, 10ID, 8 LENGTH

Fig. 2  $V_{OSC}$  TEST CIRCUIT

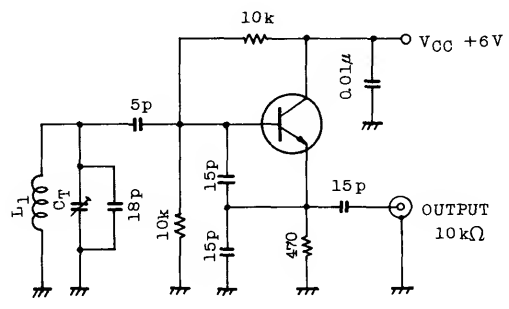

$L_1$  : 0.8mm $\phi$  SILVER PLATED COPPER WIRE, 4T, 10ID, 8 LENGTH

STATIC CHARACTERISTICS

